


CAMERA

TD-7553AE2

5MP HD Analog IR Dome Camera



- 5MP@20fps/4MP@30fps image, high resolution, true color
- AHD / TVI / CVI/CVBS standard and lossless video output
- Up to 1500 TVL resolution
- CMOS progressive scan, perfectly capture the moving object
- Support OSD menu
- High speed, long distance and real time transmission
- Auto color to B / W at low illumination
- Support ICR switch, true day / night, WDR
- Support noise reduction function
- 20 ~30m IR night view distance
- IP67&IK10
- Support COC

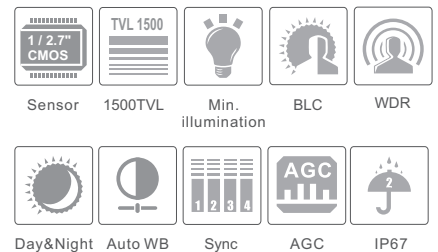

en.tvt.net.cn

For more information, please visit our website

Shenzhen TVT DIGITAL TECHNOLOGY CO., LTD.

Address: 23rd Floor, Block B4, Building NO.9, Shenzhen Bay
Eco-Technology Park, Nanshan District, Shenzhen, Guangdong
Province, P.R.China

Tel: +86-755-36995888

Web site: <http://en.tvt.net.cn>


Fax: +86-755-33104777

E-mail: overseas@tvt.net.cn

SPECIFICATIONS

Model	TD-7553AE2
Specifications	
Camera	
Image Sensor	1 / 2.7 "CMOS
Resolution	5MP
Image Size	2560 x 1936
Video Output	AHD / TVI / CVI / CVBS
Image System	PAL / NTSC
Electronic Shutter	Auto
IR Distance	20 ~ 30 m
Frame Rate	5MP @20fps
Min. Illumination	Color : 0.01 lux@F1.2, AGC ON; B/W : 0 lux with IR
Lens	2.8~12 mm (motorized)
Lens Mount	D14
S / N Ratio	≥52dB (AGC OFF)
Ingress Protection	IP67&IK10
Functions	
Function Control	OSD (COC Control)
Day & Night	ICR
Digital WDR	Yes
Digital NR	Yes
AGC	Yes
Auto White Balance	Yes
BLC	Yes
LSC	Yes
Defog	No
HLC	Yes
Sharpness	Yes
Mirror	Yes
Smart IR	Yes
Image Setting	Yes
Defect Correction	Yes
Language	13 languages
Angle Adjustment	Pan: 0°~345°; Tilt: 0°~77°; Rotation: 0°~345°
Others	
Power Supply	DC12V (± 10%)
Power Consumption	IR OFF : < 1W; IR ON : < 6W
Working Environment	- 30 °C ~ 50 °C, 10 % ~ 90 % (relative humidity)
Dimensions (mm)	Φ 141 x 100.2
Weight (net)	Approx. 0.83KG

DIMENSIONS

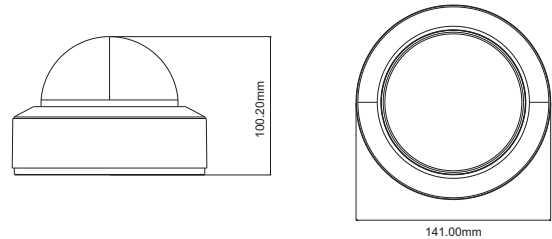

AVAILABLE ACCESSORIES



AVAILABLE MODEL

Available Model	TD-7553AE2(D/AZ/SW/AR2)	Motorized zoom lens
-----------------	-------------------------	---------------------